



It shall apply from: **20-12-2021** r.

THE ASSEMBLY INSTRUCTION OF:
SLANTED SKATEPARK RAIL
PRODUCT CODE: **100300**
FREE-STANDING



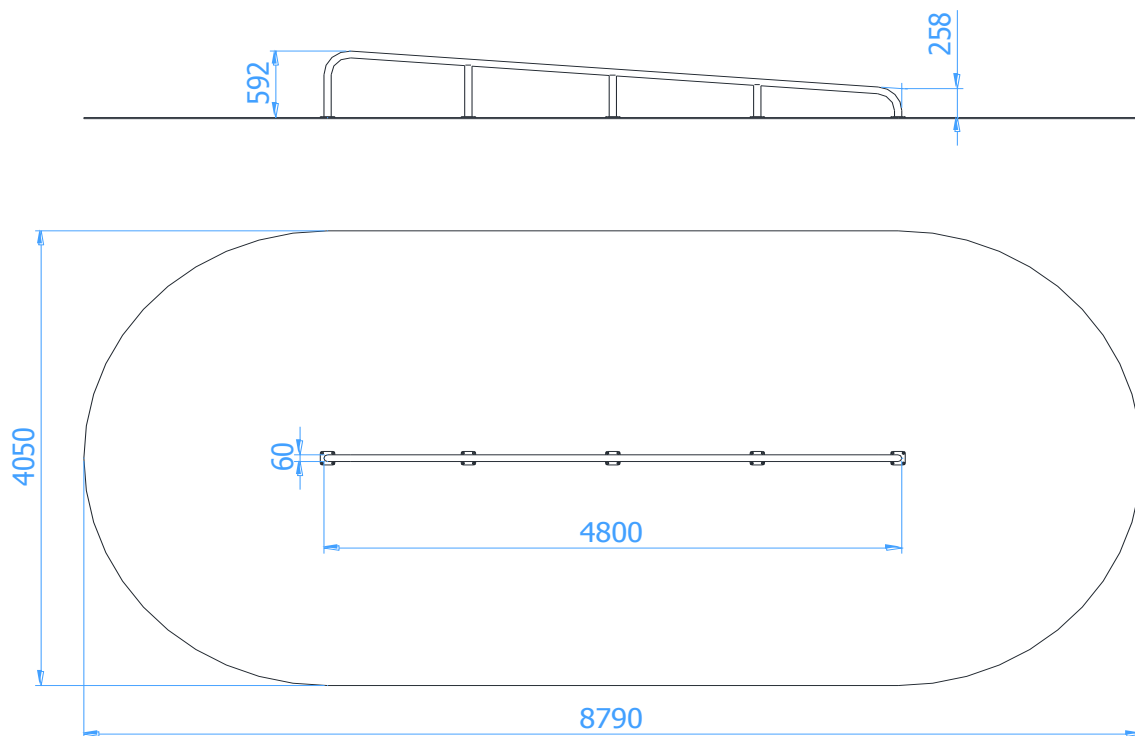


TABLE OF CONTENTS

INTRODUCTION	2
STAGE 1 – Preparatory work – safety zone	3
STAGE 2 – assembly of the construction.....	3
1. List of components	3
2. Assembly scheme	3

INTRODUCTION


- Overall dimensions: 4,80 x 0,06 x 0,60 m





STAGE 1 – Preparatory work – safety zone

- Secure the assembly site to keep others at a distance
- Set the construction in a designated place having regard to required impact area.

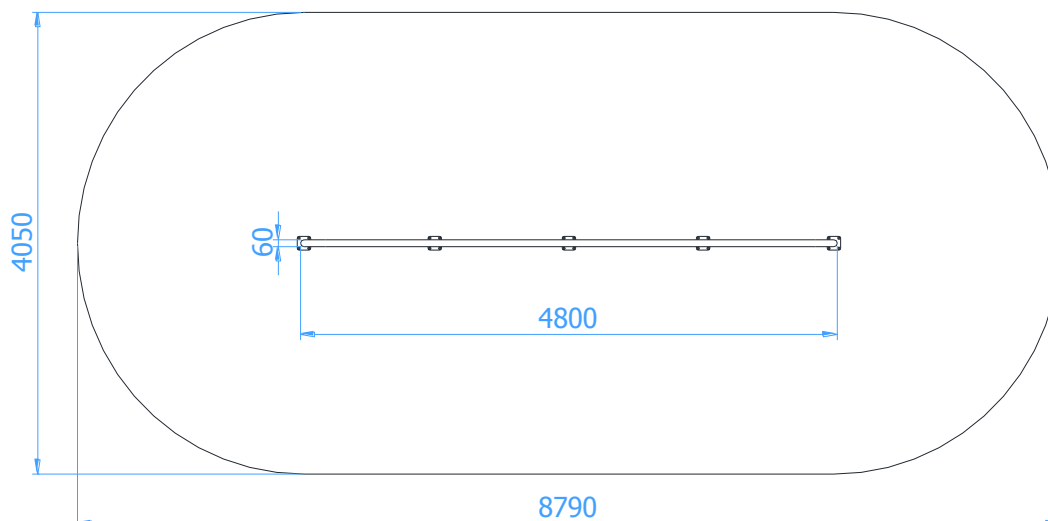

WARNING !

Installation shall be performed in accordance with safety & health standards


STAGE 2 – assembly of the construction

1. List of components

No	Name of component	Dimension	Qty.	Norm
1	Slanted Skatepark Rail		1	
2	Countersunk head screw	M12x30	20	DIN7991
3	Chemical anchor with thread	Ø18x80 – M12	20	

2. Assembly scheme

- Set the Rail in a designated place and fix it to the ground by using plastic expansion anchors.

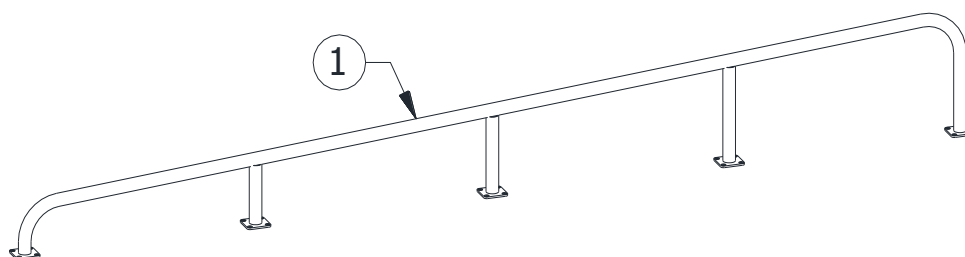

- Remove the slacks in joints.
- Put the statutory plate