



It shall apply from: **20-12-2021** r.

THE ASSEMBLY INSTRUCTION OF:
SLANTED SKATEPARK RAIL
PRODUCT CODE: **100960**
FREE-STANDING



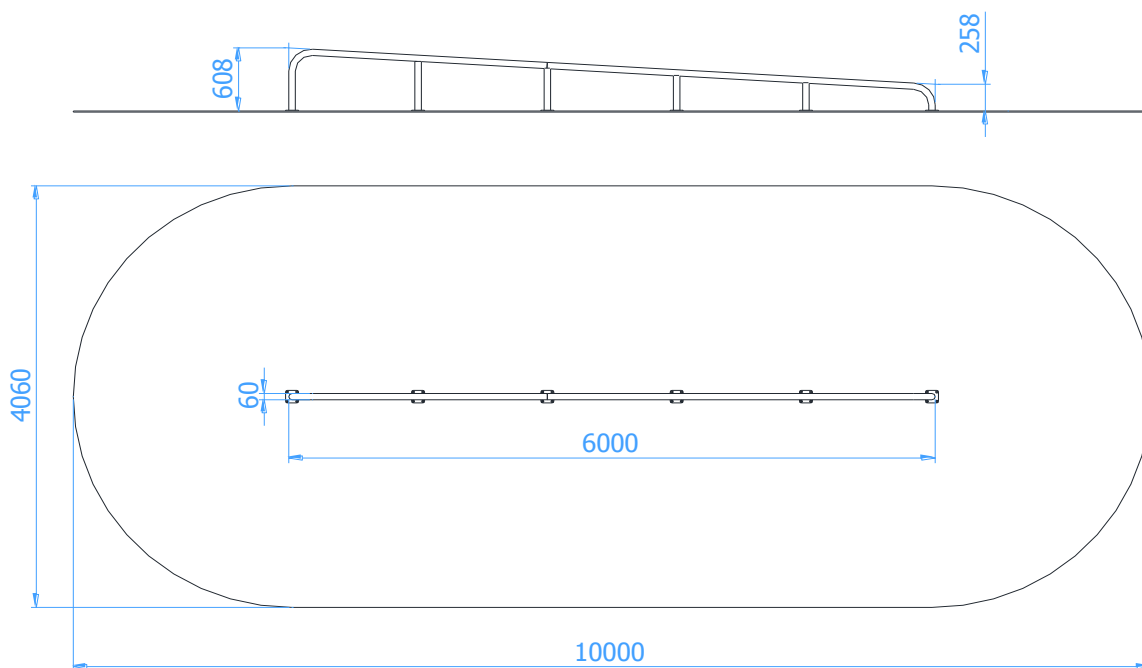


TABLE OF CONTENTS

INTRODUCTION	2
STAGE 1 – Preparatory work – safety zone	3
STAGE 2 – assembly of the construction	3
1. List of components	3
2. Assembly scheme	3

INTRODUCTION


- Overall dimensions: 6,00 x 0,06 x 0,61 m





STAGE 1 – Preparatory work – safety zone

- Secure the assembly site to keep others at a distance
- Set the construction in a designated place having regard to required impact area.

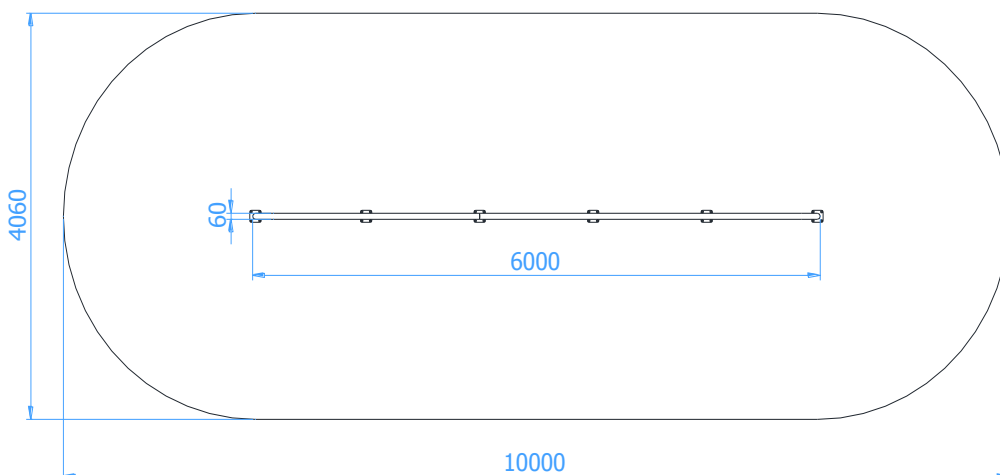

WARNING !

Installation shall be performed in accordance with safety & health standards


STAGE 2 – assembly of the construction

1. List of components

No	Name of component	Dimension	Qty.	Norm
1	Straight skate park Rail		1	
2	Countersunk head screw	M12x30	24	DIN7991
3	Chemical anchor with thread	Ø18x80 – M12	24	

2. Assembly scheme

- Set the Rail in a designated place and fix it to the ground by using plastic expansion anchors.

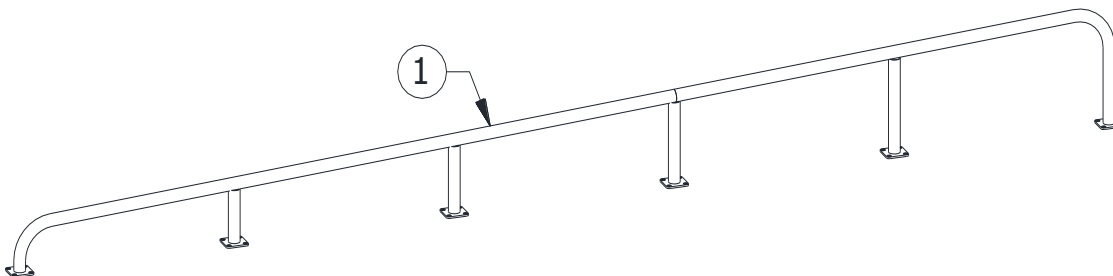

- Remove the slacks in joints.
- Put the statutory plate