

MODULAR BIRD'S NEST SWING WITH 2 AND 3 SEATS


Catalogue numbers:
7261, 7261A, 7261B, 7261C

It shall apply from: 21-07-2020


Max. Free fall heigh: 1,3 m



Product dimensions:

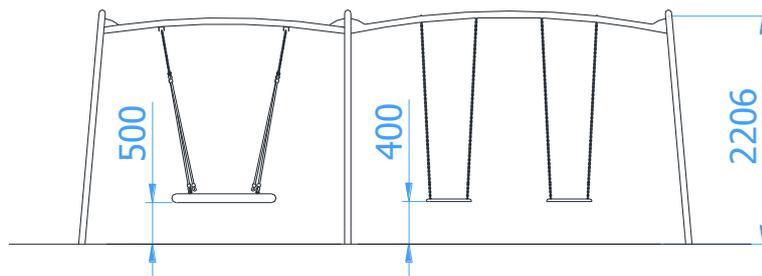

Impact area dimensions:

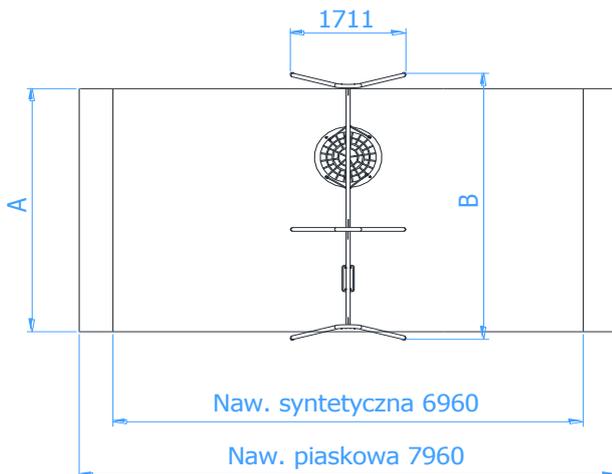

Permissible impact attenuating surface

- Bark – grain size 20 to 80mm, min. depth 200
- Woodchip – grain size 5 to 30 mm, min. depth 200mm
- Sand or gravel – grain size 0,25 to 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surface shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

An impact area of the swing shall not overlap with the impact area of any other device on the playground

Catalogue no.	Width A [mm]	Width B [mm]
7261	4077	4539
7261A	5267	5759
7261B	5267	5759
7261C	4762	5409

TECHNICAL DATA SHEET

Technical Description:

- A solid steel construction made of stainless steel pipes: $\varnothing 60,3 \times 2,6$ mm and $\varnothing 30 \times 2$ mm,
- Swing chains made of stainless steel $\varnothing 5$ mm, $\varnothing 6$ mm and reinforced rope,
- The use of Teflon bushings ensures smooth swing. The swing system requires no maintenance,
- The set includes foundations made of concrete class C25/30,
- In case of applying a synthetic surface that is on the same level that the surrounding surface, an additional 0.5 m of obstacle-free space should be taken into account in both directions of movement of the swing.

Product variants:

**7261 – Modular Bird's Nest Swing
with Flat Seat**



**7261A – Modular Bird's Nest Swing
with two Flat Seats**



**7261B – Modular Bird's Nest Swing
with Flat Seat and Baby Seat**



**7261C – Double Bird's Nest Swing
with two Bird's Nest Seats**

