

AVENIR PLAYGROUND SET15


Catalogue number: 72015

It shall apply from: 2024-06-28

Max. free fall height:	1,54 m
Product Dimensions: (length x width x height)	6,58 x 3,62 x 3,18 m
Impact area: (length x width)	10,01 x 6,5 m



Impact area dimensions

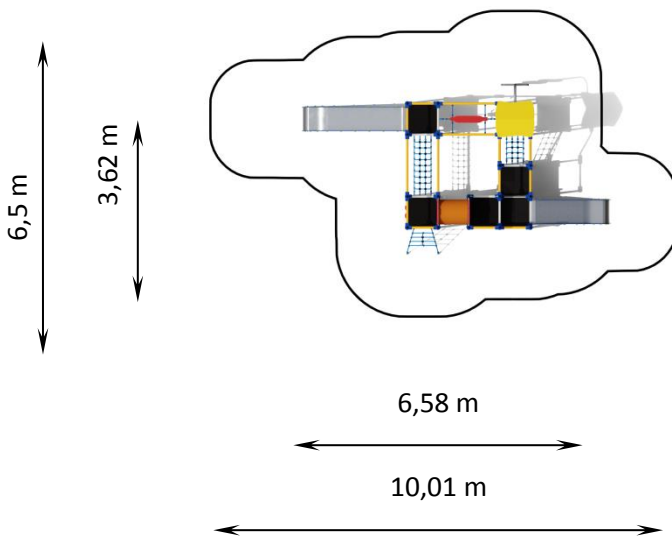

Permissible impact attenuating surface

- Bark – grain size 20 do 80 mm, min. depth 200 mm + 100mm (for displacement)
- Woodchip – grain size 5 do 30 mm, min. depth 200mm + 100mm (for displacement)
- Sand – grain size 0,2 do 2 mm, min. depth 200mm + 100mm (for displacement)
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose surface should be made so that its thickness is 100 mm greater than the minimum value given above.

Opis techniczny systemu Avenir

- Construction made of steel pipes $\varnothing 48,3 \times 2,9 \text{ mm}$,
- Surface elements made of 8mm thick HPL boards decorated with colourful prints resistant to UV radiation
- Floor platforms made of anti-slip, waterproof plywood, 21mm thick,
- Slide made of stainless steel and milled HDPE board 19mm thick
- Rope elements made of reinforced rope $\varnothing 16 \text{ mm}$,
- The steel structure is hot-dip galvanized and powder-coated,
- The set includes foundations made of concrete of class C25/30.

TECHNICAL DATA SHEET

List of components

- Tower W4-950-BD x2szt
- Tower W4-1350-ZD2 x1szt
- Tower W4-1350-BD x3szt
- Straight climbing entrance with handles H1350 x1szt
- Slanted rope ladder H1350 x1szt
- Straight rope ladder H1350 x1szt
- Tunnel L660 H1350 x1szt
- Firemen's snake entrance H1350 x1szt
- Necking H1350 x2szt
- Crossbar H950 x3szt
- Crossbar H1350 x6szt
- Most linowy gęsty skos L660 H950-1350 x1szt
- Most linowy gęsty L1320 H1350 x1szt
- Belka ruchoma L1320 H1350 x1szt
- Zjeżdżalnia prosta H950 x1szt
- Zjeżdżalnia prosta H1350 x1szt
- Dach D2 x1szt

Product visualization

