

## STREET WORKOUT ST NO. 25


Catalogue number: 88025

It shall apply from: 22-01-2024


<b>Max. free fall height:</b>	2,80 m
<b>Product Dimensions:</b> (length x width x height)	6,90 x 4,25 x 3,90 m
<b>Impact area:</b> (length x width)	10,34 x 8,05 m
<b>Free zone:</b>	65,3 m <sup>2</sup>



### Product dimensions

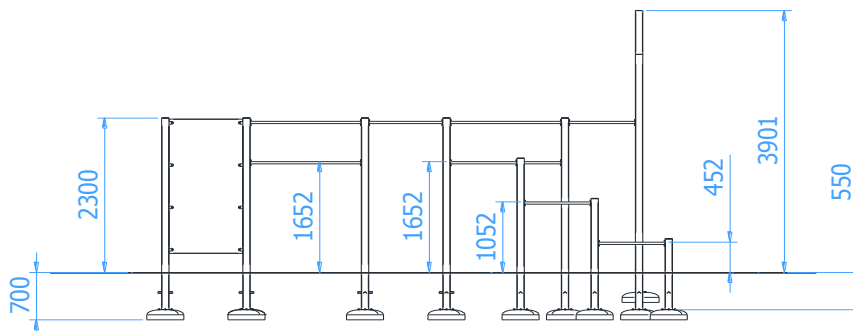

### Impact area dimensions

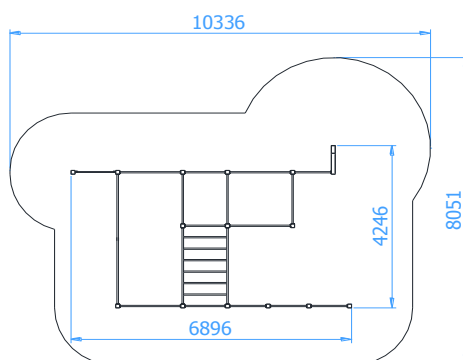

### Permissible impact attenuating surface

- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance with tested HIC (EN 1177)

*The impact attenuating surfacing shall be installed on the whole of impact area.*

*A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.*

### Technical description

- All posts made of closed profiles 100x100x3mm,
- Bars made of Ø33,7x4mm pipes
- Side wall made of 8mm HPL sheet
- Horizontal ladder made of Ø33,7x4mm and Ø38x4mm pipes
- Ø40mm jute climbing rope
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20

## TECHNICAL DATA SHEET

### Components of the Set

- Climbing rope – 1pc.
- Side 1all – 1pc.
- Exercise pole – 1pc.
- Horizontal ladder – 1pc.
- Pull-up bar – 14pcs.

### Product visualization

