


DOUBLE EXERCISE BENCH


Catalogue number: 88230

It shall apply from: 24-01-2024


Max. free fall height:	1,20 m
Product Dimensions: (length x width x height)	3,01 x 1,91 x 1,20 m
Impact area: (length x width)	6,01 x 4,91 m
Free zone:	27,5 m ²

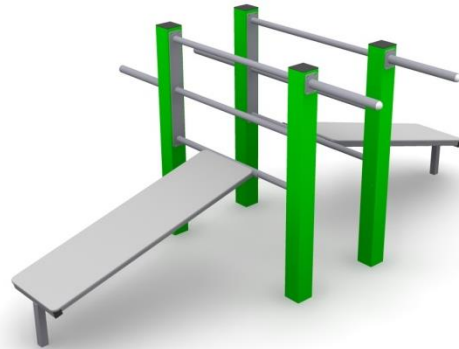

Product dimensions

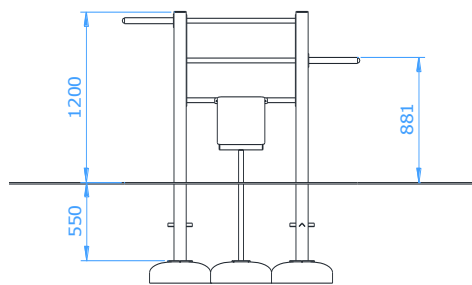

Impact area dimensions

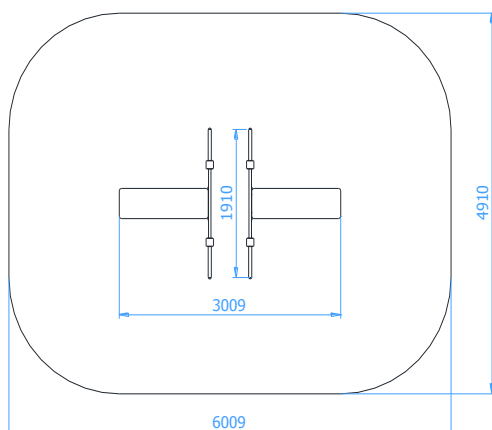

Permissible impact attenuating surface

- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- Posts made of closed profiles 100x100x3mm
- Ladder made of 33,7x4mm pipe
- Construction of the bench made of profiles: 30x18x3mm and 40x40x3mm
- Seat of the bench made of 15mm HDPE sheet
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20