


PARKOUR RAIL KIT S3

Catalogue number: 89006


Users' age group:	6+
Max. free fall height :	0,98 m
Product dimensions: (length x width x height)	6,72 x 3,02 x 1,06 m
Impact area dimensions: (length x width)	9,50 x 5,80 m
Free zone:	53,2 m ²



Product dimensions

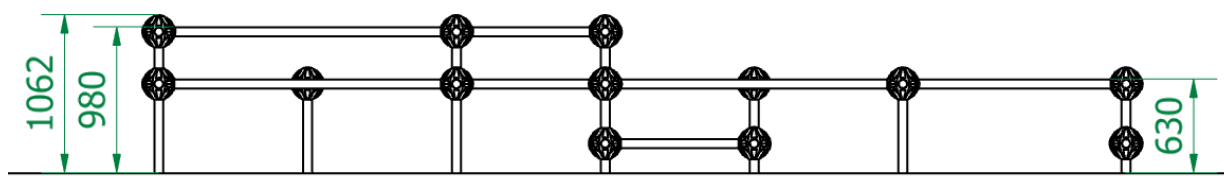

Impact area dimensions

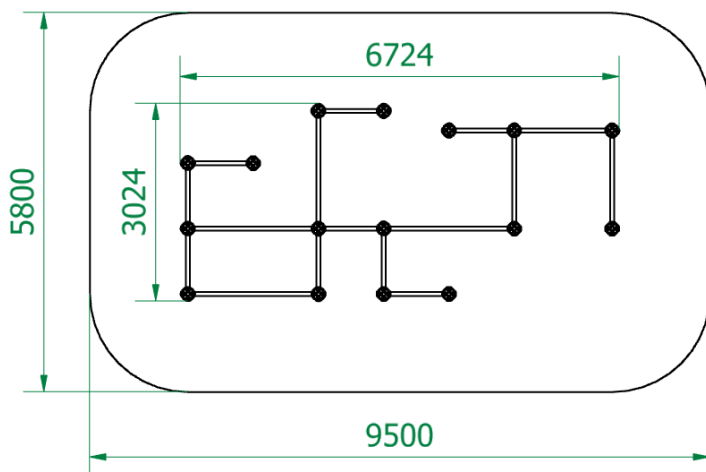

Permissible impact attenuating surface

- Bark – grain size 20 do 80 mm, min. depth 200 mm + 100mm (for displacement)
- Woodchip – grain size 5 do 30 mm, min. depth 200mm + 100mm (for displacement)
- Sand – grain size 0,2 do 2 mm, min. depth 200mm + 100mm (for displacement)
- Gravel – grain size 2 do 8 mm, min. depth 200 mm + 100mm (for displacement)
- Synthetic surfaces in accordance with tested HIC (EN 1177)

The impact attenuating surfacing shall be installed over the entire impact area

Technical description

- Construction made of stainless steel and plastic connectors.
- HPL construction components
- Non-slip, waterproof plywood platforms
- The set includes foundations made of concrete class C25/30