


STREET WORKOUT SET NO. 6


Catalogue number: 88006

It shall apply from: 31-07-2024


Max. free fall height:	2,80 m
Product Dimensions: (length x width x height)	5,30 x 4,12 x 3,90 m
Impact area: (length x width)	8,30 x 7,96 m
Free zone:	54,7 m ²

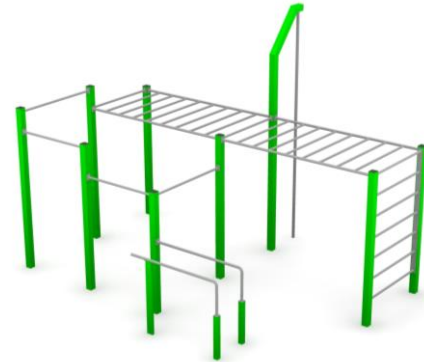

Product dimensions

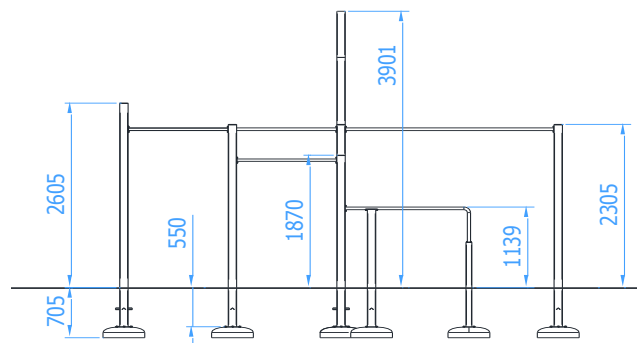

Impact area dimensions

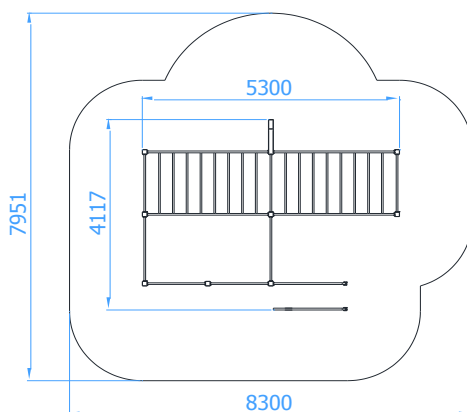

Permissible impact attenuating surface

- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance with tested HIC (EN 1177)

*The impact attenuating surfacing shall be installed on the whole of impact area.
A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.*

Technical description

- All posts made of closed profiles 100x100x3mm
- Bars and ladder made of $\varnothing 33,7 \times 4$ mm pipes
- Exercise pole made of $\varnothing 48,3 \times 2,9$ mm pipe and closed profiles 70x70x3mm
- Parallel bars made of $\varnothing 38 \times 4$ mm bars
- Horizontal ladders made of pipes: $\varnothing 38 \times 4$ mm and $\varnothing 33,7 \times 4$ mm,
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20

TECHNICAL DATA SHEET

Components of the Set

- Pull-up bar – 4pcs.
- Parallel bars – 1set
- Ladder – 1pc.
- Horizontal ladder – 2pcs.
- Exercise pole – 1pc.

Product visualization

