


## PARALLEL BARS


Catalogue number: 88130

It shall apply from: 16-07-2024


<b>Max. free fall height:</b>	1,16 m
<b>Product Dimensions:</b> (length x width x height)	2,57 x 0,59 x 1,16 m
<b>Impact area:</b> (length x width)	5,57 x 3,59 m
<b>Free zone:</b>	18,0 m <sup>2</sup>

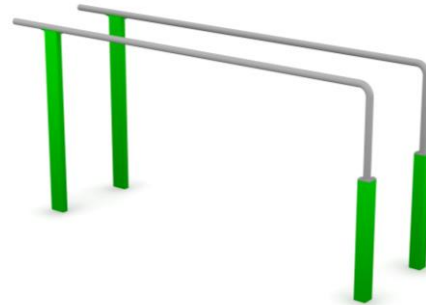

### Product dimensions

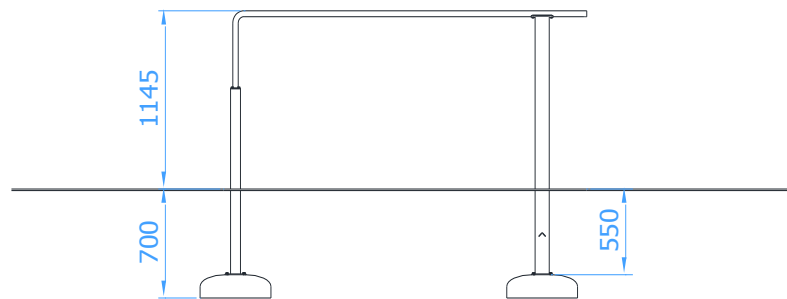

### Impact area dimensions

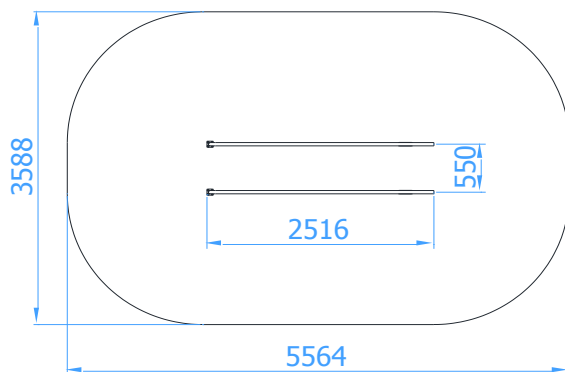

#### Permissible impact attenuating surface

- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

*The impact attenuating surfacing shall be installed on the whole of impact area.*

*A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.*

### Technical description

- Bars made of  $\varnothing 38 \times 4$ mm, 70x70x3mm and 100x40x3mm pipes,
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20