

STANDARD PLAYGROUND SET 51


Catalogue number: 70051

It shall apply from: 2024-09-05

Max. free fall height:	0,98 m
Product Dimensions: (length x width x height)	3,02 x 3,06 x 2,91 m
Impact area: (length x width)	6,44 x 5,74 m



Impact area dimensions

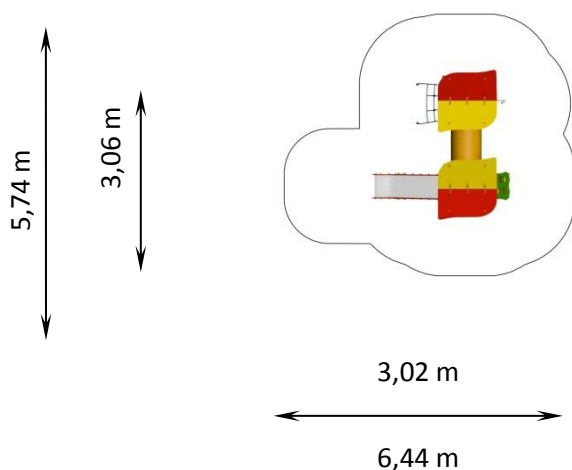

Dopuszczalna nawierzchnia amortyzująca

- Turf
- Bark – grain size 20 do 80 mm, min. depth 200mm
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200mm
- Synthetic surfaces in accordance with tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- A solid construction made of hot dip galvanized, painted steel
- Side surfaces made of HDPE and HPL sheets
- The decks made of an anti-slip waterproof plywood, 21mm thick
- All steel elements are protected against corrosion
- Includes a foundation made of concrete class C25/30 which make installation easier

TECHNICAL DATA SHEET

List of components

- SK-WDL Rope ladder 980 x1szt
- SK-ZLK Slide 980 x1szt
- SK-WRS Fireman's pole 980 x1szt
- SK-D2 Gable roof x2szt
- SK-WSP Climbing wall 980 x1szt
- SK-WSPS Slanted climbing wall 980 x1szt
- SK-PT2 Short tunnel x1szt
- SW-W4 Tower 980 with roof x2szt
- SK-BR-KP Barrier with bull eye x1szt

Product visualization

