

AGILITY TRAINING HEXAGON UNIT


Catalogue number: 2145

It shall apply from: 20-08-2020


Max. free fall height:	2,00 m
Product Dimensions: (length x width x height)	2,75 x 2,50 x 2,06 m
Impact area (length x width)	5,95 x 5,38 m
Free zone	31,2 m ²



Product dimensions

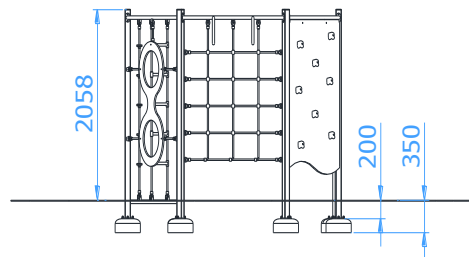

Impact area dimensions

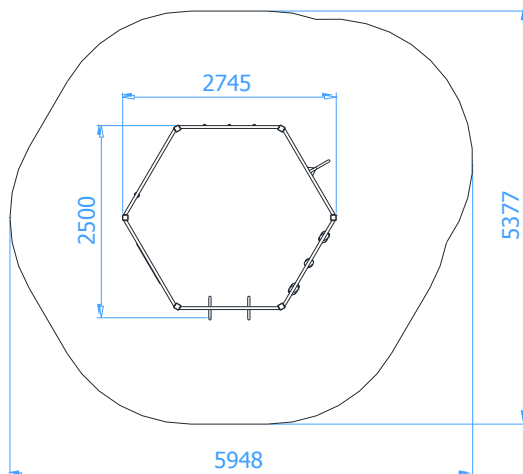

Acceptable shock-absorbing surface:

- Turf
- Bark – grain size 20 do 80 mm, min. depth 200 mm + 100mm
- Woodchip – grain size 5 do 30 mm, min. depth 200mm + 100mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm + 100mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm+ 100mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- A solid steel construction made of profile 70x70x3mm and steel pipes $\varnothing 30 \times 2 \text{mm}$ and $\varnothing 38 \times 2,6 \text{mm}$,
- Climbing net made of $\varnothing 16 \text{ mm}$ PP ropes with galvanized steel wires
- Climbing wall made of waterproof plywood 21mm thick
- All steel elements are protected against corrosion and painted with an acrylic lacquer
- The set includes a foundation made of concrete of class C25/30 which make installation easier

Product visualization

