


MERRY-GO-ROUND TOMEK


Catalogue number: 2208

It shall apply from: 06-04-2018


Users age	3 – 14 yo
Max. free fall height:	0,47 m
Product Dimensions: (length x width x height)	Ø1,35 x 0,80 m
Impact area: (length x width)	Ø5,35 m
Free zone:	22,5 m ²



Product dimensions

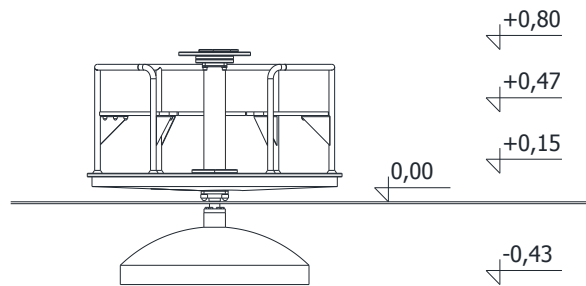

Impact area dimensions

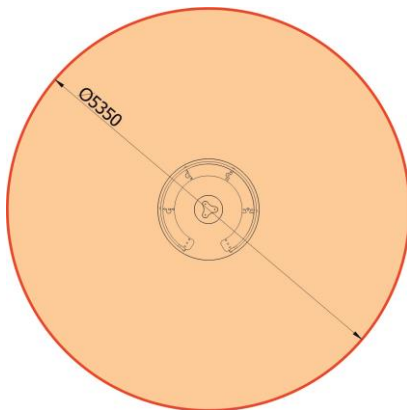

Permissible impact attenuating surface

- Turf
- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- Construction made of steel pipe Ø114,3x4mm, Ø30x2mm and sheet metal 5mm thick,
- Floor made of anti-slip HDPE board 18mm thick,
- Seats and the steering wheel made of HDPE board 19mm thick,
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer,
- The set includes foundations made of concrete class C25/30.

Product visualization

