


## WHEELCHAIR ACCESSIBLE SWING SLIDE


Catalogue number: 2280

It shall apply from: 21-06-2017


<b>Max. free fall height:</b>	1,41 m
<b>Product dimensions:</b> (length x width x height)	5,18 x 1,33 x 2,01 m
<b>Impact area</b> (length x width)	8,18 x 4,33 m
<b>Free zone</b>	33,4 m <sup>2</sup>

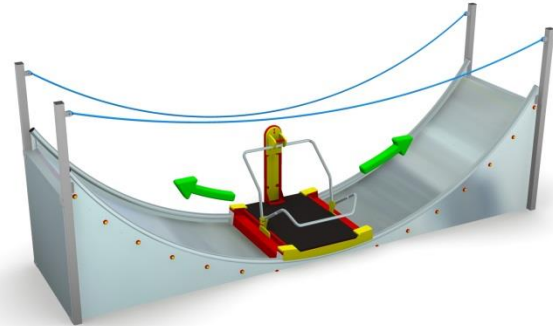

### Product dimensions

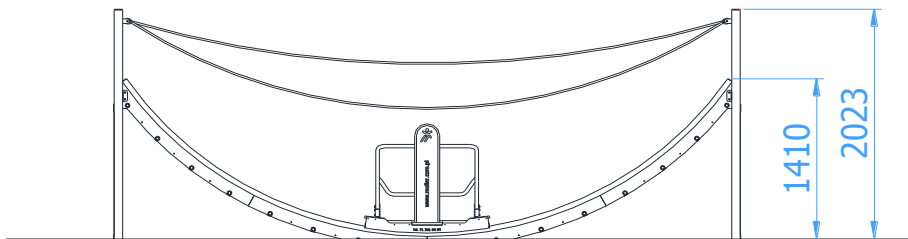

### Impact area dimensions

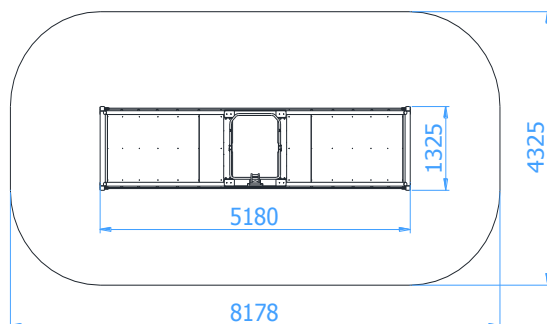

### Recommended shock-absorbing surfaces:

- Turf
- Bark – grain size 20 do 80 mm, min. depth 200 mm
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

*The impact attenuating surfacing shall be installed on the whole of impact area.*

*A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.*

### Technical description

- A solid steel construction made of profiles: 70x70x3mm and 40x40x3mm,
- Running rails made of stainless steel pipe  $\varnothing 60,3 \times 2,5$ mm
- 16mm armed ropes
- The trolley equipped with casters and a hand-brake
- The side surfaces are made of 6mm HPL sheet and 19mm HDPE sheet
- All steel elements are protected against corrosion and painted with acrylic lacquer
- Includes a foundation made of concrete class C25/30 which make installation easier

# TECHNICAL DATA SHEET

## Product visualizations

