

SPINNING ROCKET SPRING ROCKER


Catalogue number: 2302

It shall apply from: 30-01-2018


Max. free fall height:	0,59 m
Product Dimensions: (length x width x height)	Ø0,78 x 1,46 m
Impact area (length x width)	Ø4,78 m
Free zone	18,0 m ²



Product dimensions:

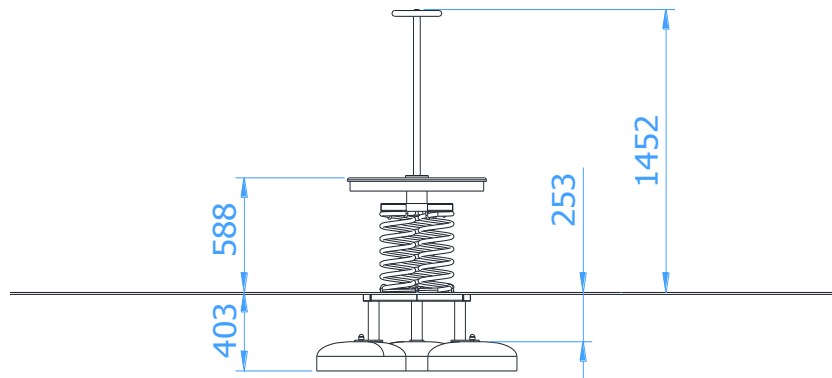

Impact area dimensions:

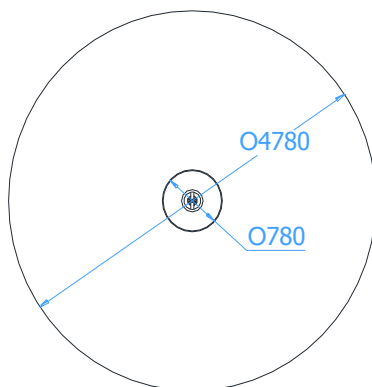

Acceptable shock-absorbing surface:

- Turf
- Bark – grain size 20 do 80 mm, min. depth 200 mm + 100mm
- Woodchip – grain size 5 do 30 mm, min. depth 200mm + 100mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm + 100mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm+ 100mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- Construction made of steel profiles: 80x40x3mm, 40x40x3mm and pipe Ø60,3x2,9mm, Ø38x2,9mm,
- The platform made of anti-slip HDPE sheet 18mm width
- The device mechanism bases on bearings which shall not require a maintenance
- All steel elements are protected against corrosion and painted with an acrylic lacquer
- The set includes a foundation made of concrete of class C25/30 which make installation easier

TECHNICAL DATA SHEET

Product visualization

