


STREET WORKOUT SET NO. 3


Catalogue number: 88003

It shall apply from: 22-01-2024


Max. free fall height:	1,30 m
Product Dimensions: (length x width x height)	5,45 x 1,20 x 2,30 m
Impact area: (length x width)	8,05 x 4,20 m
Free zone:	28,4 m ²

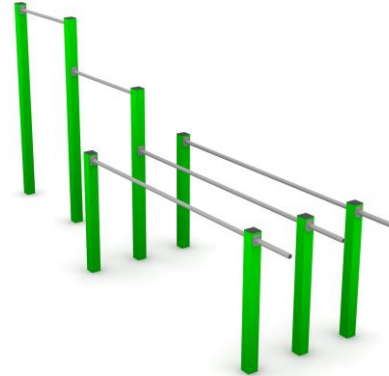

Product dimensions

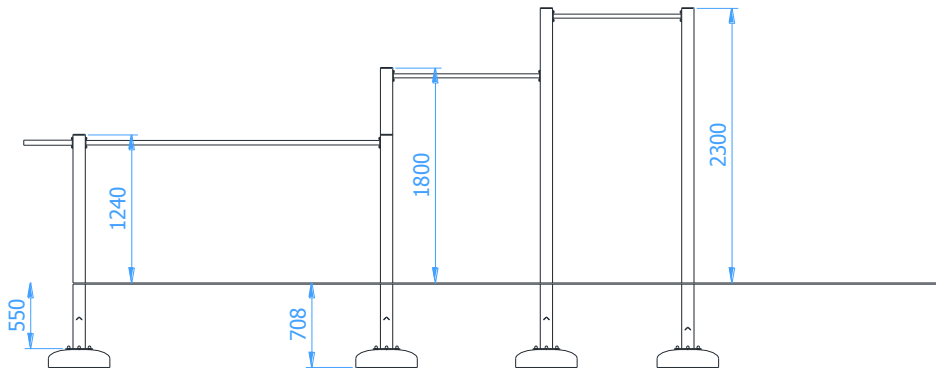

Impact area dimensions

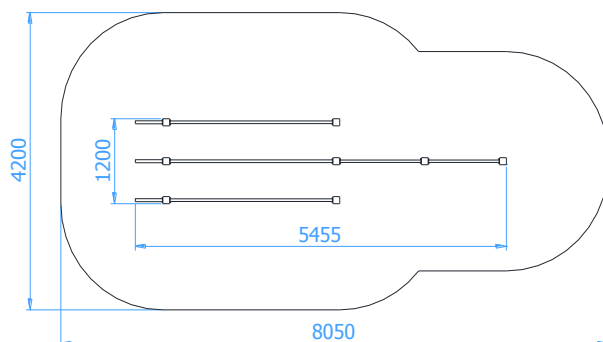

Permissible impact attenuating surface

- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance with tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- All posts made of closed profiles 100x100x3mm
- Pull-up bars made of $\varnothing 33,7 \times 4$ mm pipes
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20

TECHNICAL DATA SHEET

Components of the Set

- Pull-up bars – 2 pcs.
- Parallel bars – 3 pcs.

Product visualization

