


## STREET WORKOUT EXERCISE BENCH


Catalogue number: 88110

It shall apply from: 24-01-2024


<b>Max. free fall height:</b>	1,20 m
<b>Product Dimensions:</b> (length x width x height)	1,28 x 1,10 x 1,20 m
<b>Impact area:</b> (length x width)	4,28 x 4,10 m
<b>Free zone:</b>	15,5 m <sup>2</sup>



### Product dimensions

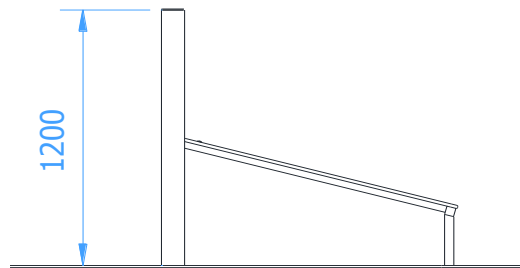

### Impact area dimensions

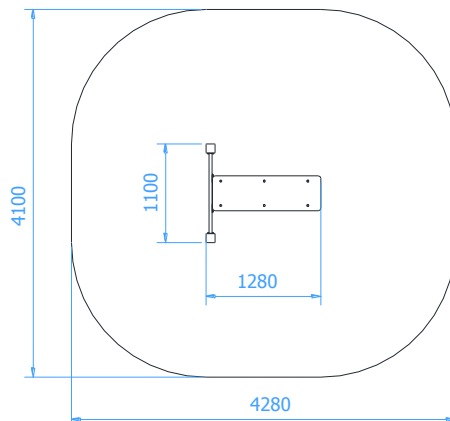

### Permissible impact attenuating surface

- Bark – grain size 20 do 80mm, min. depth 200
- Woodchip – grain size 5 do 30 mm, min. depth 200mm
- Sand – grain size 0,2 do 2 mm, min. depth 200mm
- Gravel – grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance with tested HIC (EN 1177)

*The impact attenuating surfacing shall be installed on the whole of impact area.*

*A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.*

### Technical description

- Posts made of profiles 100x100x3mm,
- Ladder made of Ø33,7x4mm pipe
- Construction of the bench made of profiles: 30x18x3mm and 40x40x3mm
- Seat of the bench made of 15mm HDPE sheet
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20