

It shall apply from: 2024-06-27

e-mail: marketing@muller.com.pl tel. 071 318 84 84, fax 071 318 84 83

TECHNICAL DATA SHEET


AVENIR LITTLE KNIGHT

Catalogue number: 72506

Max. free fall height:	0,71 m
Product Dimensions: (length x width x height)	3,37 x 2,51 x 2,63 m
Impact area: (length x width)	6,32 x 5,4 m



Impact area dimensions

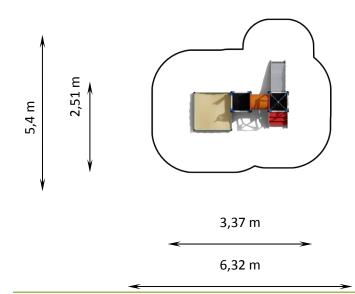

Permissible impact attenuating surface

Turf

- Bark grain size 20 do 80 mm, min. depth 200 mm + 100mm (for displacement)
- Woodchip grain size 5 do 30 mm, min. depth 200mm + 100mm (for displacement)
- Sand grain size 0,2 do 2 mm, min. depth 200mm + 100mm (for displacement)
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose surface should be made so that its thickness is 100 mm greater than the minimum value given above.

Technical description

- Construction made of steel pipes Ø48,3x2,9mm,
- Surface elements made of 8mm thick HPL boards decorated with colourful prints resistant to UV radiation
- Floor platforms made of anti-slip, waterproof plywood, 21mm thick,
- Slide made of stainless steel and milled HPL board 10mm thick
- Rope elements made of reinforced rope Ø16mm,
- The steel structure is hot-dip galvanized and powder-coated,
- The set includes foundations made of concrete of class C25/30.



```
List of components
```

- Tower W4-550-ZD4 x1pc
- Tower W4-550-BD x1pc
- Small climbing entrance H550 B x1pc
- Tunnel L660 H550 x1pc
- Stairs H550 x1pc
- Necking H550 x2pc
- Side panel with tic-tac-toe gameH550 x1pc
- Side panel A4 Knight H550 x1pc
- Sandbox 4K L1320 x1pc
- Dragon slide H550 x1pc
- Roof D4 with flag x1pc

Product visualization

