


# TECHNICAL DATA SHEET


# STREET WORKOUT SET NO. 7

Catalogue number: 88007

It shall apply from: 22-01-2024	
Max. free fall height:	1,60 m
Product Dimensions: (length x width x height)	7,60 x 5,30 x 2,60 m
Impact area: (length x width)	10,63 x 8,3 m
Free zone:	73,1 m <sup>2</sup>



#### **Product dimensions**

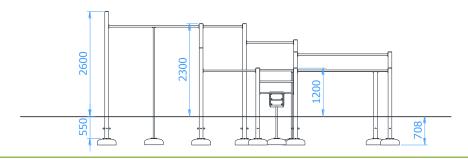

### Impact area dimensions

# 7600

# Permissible impact attenuating surface

- Bark grain size 20 do 80mm, min. depth200
- Woodchip grain size 5 do 30 mm, min. depth 200mm
- Sand grain size 0,2 do 2 mm, min. depth 200mm
- Gravel grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

## **Technical description**

- All posts made of closed profiles 100x100x3mm
- All bars made of pipes: Ø33,7x4mm and Ø 38,4mm
- Horizontal ladder made of Ø38x4mm and Ø33,7x4mm pipes
- Exercise ladder made of Ø33,7x4mm pipe
- Exercise bench made of 15mm HDPE sheet
- Parallel bars made of Ø38x4mm pipe
- Exercise pole made of Ø38x4mm pipe
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20





# TECHNICAL DATA SHEET

## **Components of the Set**

- Pull-up bar 5pcs.
- Ladder 1pc.
- Horizontal ladder 1pc.
- Exercise pole 1pc.
- High parallel bars 1set
- Low parallel bars 1set
- Exercise bench with small ladder 1pc.
- Long bar 4pcs.

#### **Product visualization**

