

TECHNICAL DATA SHEET


STREET WORKOUT SET NO. 14

Catalogue number: 88014


It shall apply from: 22-01-2024	
Max. free fall height:	1,30 m
Product Dimensions: (length x width x height)	7,62 x 6,16 x 2,30 m
Impact area: (length x width)	10,62 x 9,42 m
Free zone:	60,2 m ²



Product dimensions

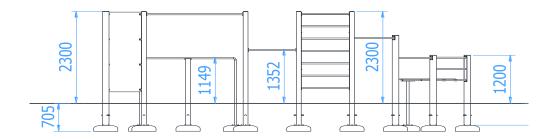

Impact area dimensions



Permissible impact attenuating surface


- Bark grain size 20 do 80mm, min. depth200
- Woodchip grain size 5 do 30 mm, min. depth 200mm
- Sand grain size 0,2 do 2 mm, min. depth 200mm
- Gravel grain size 2 do 8 mm, min. depth 200 mm
- Synthetic surfaces in accordance whit tested HIC (EN 1177)

The impact attenuating surfacing shall be installed on the whole of impact area.

A loose-fill safety surface shall be 100mm thicker than min. depth indicated above.

Technical description

- All posts made of closed profiles 100x100x3mm
- Bars and ladder made of Ø33,7x4mm pipes
- Seat of the exercise bench made of 15mm HDPE sheet
- Horizontal ladder made of pipes: Ø33,7x4mm and Ø38x4mm
- Side wall made of 8mm HPL sheet
- Parallel bars made of Ø38x4mm pipe
- All steel elements are hot-dip galvanized and painted with an acrylic, structured lacquer
- The set includes foundations made of concrete class C25/30
- All posts shall be set in concrete class C16/20





TECHNICAL DATA SHEET

Components of the Set

- Exercise bench with small ladder 1pc.
- Parallel bars 1set
- Side wall 1pc.
- Ladder 1pc.
- Horizontal ladder 1pc.
- Pull-up bar 7pcs.

Product visualization

